



High Temperature, 1" Double- Wall,
All-Fuel Chimney System,
ULC S629, ULC S604, and UL 103HT

Only Available in Canada

DuraTech[®] Canada

DuraVent[®]

Leaders in-Venting Innovation™

At DuraVent, we have been manufacturing chimney since 1956

That makes us one of the oldest manufacturers of venting products in North America.

The knowledge & experience gained over the years is reflected in the quality of the venting products we offer today. DuraTech Canada (DTC) is a perfect example. This all-fuel chimney was developed for hearth professionals in 2014, and is based on a proven design.

It is ideal for use with all solid-fuel appliances including freestanding wood stoves. DTC's slim profile and smaller frame size are ideal for use in tight spaces. The lighter weight also makes it easy on the back; an important feature for installers who climb ladders every day.

Even better – unlike some competitors, when enclosed DTC requires no continuous shields to meet Canada's ULC-S629 Standard.



DuraTech Canada Features & Benefits

| FEATURES | BENEFITS |
|--|---|
| Proven engineered design with inner flue and outer casing both made of sturdy, high-quality, corrosion-resistant stainless steel | <ul style="list-style-type: none"> • Long, dependable service life means this will be the last chimney your home will ever need |
| Free-Floating stainless inner flue | <ul style="list-style-type: none"> • Flue is fixed only to male coupler on one end leaving it free to accommodate thermal expansion & contraction • Minimizes risk of metal fatigue and associated buckling / tearing that can occur with use; especially during chimney fires |
| Laser-Welded Inner and Outer Seams | <ul style="list-style-type: none"> • Enhances vertical strength • Eliminates potential source of leakage • Improves product quality & consistency |
| Twist-Lock Assembly with End Couplers | <ul style="list-style-type: none"> • Enables quick connection of pipe lengths in seconds with just a 1/8th turn • Eliminates need for awkward locking bands • Multi-point contact between couplers combined with generous overlap adds cross-sectional strength and reliable joint connection |
| One-inch wall thickness filled with exclusive mineral-wool insulation that will not shift or settle | <ul style="list-style-type: none"> • Insulation helps to keep the heat in and the cold out • Maintains higher flue-gas temperatures for fast start-ups and stable draft performance • Reduces condensation and related creosote deposits – the fuel that feeds a chimney fire • Eliminates risk of hot-spots |
| Slim, compact profile and lower weight yet still permits installation with as little as 2" clearance-to-combustibles | <ul style="list-style-type: none"> • Fits within a smaller frame and enclosure making it ideal for use in both renovation and new construction • DTC is easy on the back - 6" diameter weighs in at just 5.2 lbs. per linear foot |
| No need for continuous shields when enclosed | <ul style="list-style-type: none"> • Eliminates cost of extra parts & labour • Simplifies installations |
| Heavy-Duty Ceiling Supports with Integrated Coupler & Flue Extension | <ul style="list-style-type: none"> • Factory-assembled as a single part to minimize air leakage around chimney • Reduces number of parts needed and simplifies installation |
| Wide variety of insulated components and vapor-barrier friendly designs to match today's high-efficient homes | <ul style="list-style-type: none"> • Keeps heating dollars in the home instead of being lost through walls & ceilings • Taller shields to suit deeper attic insulation levels • Ability to seal around chimney minimizes potential air leakage • Reduces risk of severe condensation in cold climates • Helps to prevent water damage within exterior walls and within ceiling / roof assemblies |
| Universal Support Hardware | <ul style="list-style-type: none"> • Roof Brace, Roof Support, Wall Support, and Wall Band all feature universal collar that can be sized to fit any diameter of DTC pipe from 5" up to 8" |
| Industry's BEST Limited Lifetime Warranty | <ul style="list-style-type: none"> • Unlike most others, our warranty is TRANSFERABLE to a future owner (competitor warranties are good only to the original purchaser) • Adds value for both the homeowner and prospective homeowner |

Specifications

Applications

DuraTech Canada (DTC) is a double-wall, all-fuel chimney system for use with wood stoves, wood fireplaces and other appliances using wood, oil, gas, or coal.

Materials and Construction

.016" 441 stainless steel inner wall.
.016" 430 stainless steel outer wall.
1" high-temperature mineral fiber insulation. Laser welded seam.

Clearances

2" clearance to combustibles

Diameters

5", 6", 7", 8", 10"

Listings

ULC S629, ULC S604, and UL 103HT

ULC S629, ULC S604, and UL 103HT System


DuraTech® Canada

DuraTech Canada (DTC) is a double-wall, all-fuel chimney system for use with wood stoves, wood fireplaces and other appliances using wood, oil, gas, or coal. The use of stainless steel, selected for its resistance to high temperatures and corrosion, lends outstanding durability to the DuraTech Canada high-temperature chimney.

DuraTech Canada features 1" of high-temperature mineral fiber insulation. This insulation minimizes heat loss through the chimney walls and can withstand intense heat. The free-floating inner lining is attached only to the male coupler at the top, expanding and contracting freely with temperature fluctuations. The external casing carries the structural load. All DTC pipe lengths, elbows, and other fittings feature fast and easy twist-lock assembly with just one-eighth turn. Even better, DTC uses universal support hardware to speed up installation and to dramatically reduce the number of SKUs you need to keep in inventory.



Typical Installations

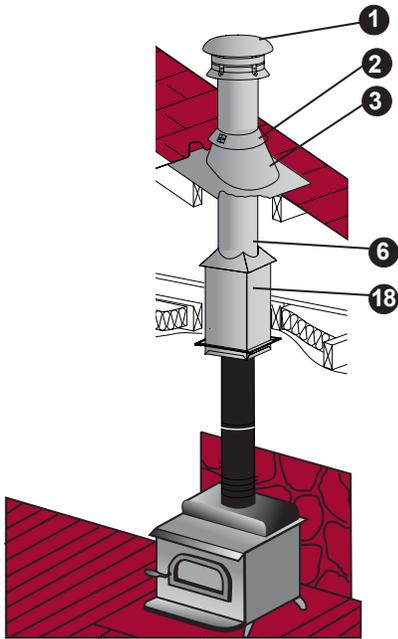


Single-Story Woodstove


Installation Key

| | | | |
|----|--------------------------|----|---------------------------|
| 1 | Vertical Cap | 11 | Floor Support |
| 2 | Storm Collar | 12 | Flue Extension |
| 3 | Adjustable Roof Flashing | 13 | Tee |
| 4 | Attic Radiation Shield | 14 | Wall Thimble |
| 5 | Firestop | 15 | Tee Cap |
| 6 | Length | 16 | Tee Support |
| 7 | Finishing Support | 17 | Anchor Plate (optional) |
| 8 | Re-Support | 18 | Reduced Clearance Support |
| 9 | Wall Radiation Shield | | |
| 10 | Elbow | | |


- Refer to our Typical Venting Installation drawings to select the appropriate component parts for your installation.
- Always refer to installation instructions for complete information.

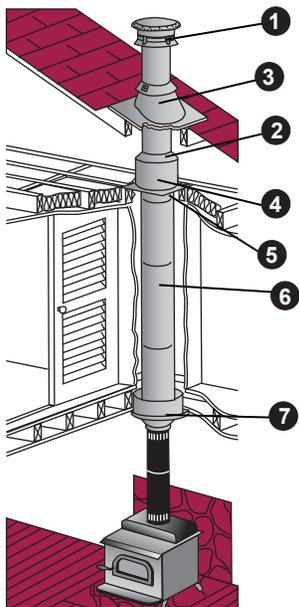

Multi-story Woodstove

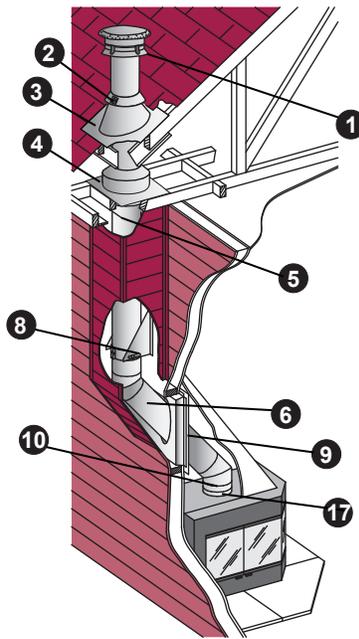

Fireplace through exterior insulated chase

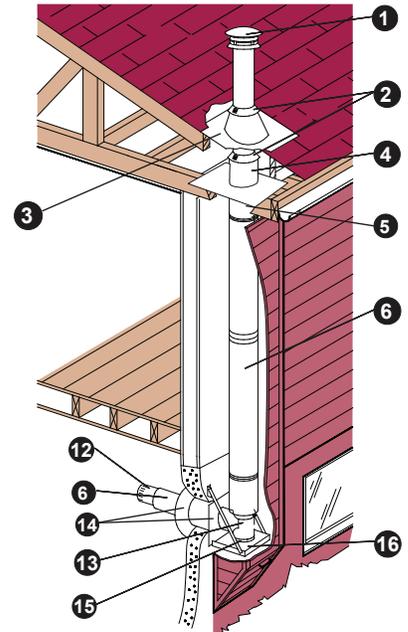

Exterior installation to a wood stove

For guidance in selecting stovepipe components, see our catalogs for DuraVent's DVL, DDW, or DuraBlack stovepipe.

Loadbearing Capacity

Please reference the chart below for each diameter's and supports load bearing capacity. Maximum height in feet.

| Ø Interior | 5" | 6" | 7" | 8" | 10" |
|---------------------------|----|----|----|----|-----|
| Floor Support Plate | 32 | 32 | 32 | 32 | 32 |
| Reduced Clearance Support | -- | 60 | 50 | 45 | -- |
| Adjustable Tee Support | 63 | 63 | 55 | 48 | 39 |
| Roof Support | 42 | 34 | 27 | 24 | 20 |
| Wall Support | 63 | 28 | 24 | 20 | |
| Square Cathedral Support | -- | 60 | 50 | 45 | 35 |
| Finishing Support | -- | 75 | 65 | 59 | -- |

Size of Openings

The size of the opening may vary depending on the pitch of the roof.

Always maintain the minimum 2" clearances to the chimney. The only exception to this rule is with Reduced Clearance Supports (RCS). Consult our instructions.

| Ø Interior | 5" | 6" | 7" | 8" | 10" |
|---------------------------|---------|---------|---------|---------|---------|
| Floor Support Plate | 11 3/8" | 12 3/8" | 13 3/8" | 14 3/8" | 16 3/8" |
| Finishing Support | 11 3/8" | 12 3/8" | 14 3/8" | 14 3/8" | -- |
| Roof Support | 11 3/8" | 12 3/8" | 13 3/8" | 14 3/8" | 16 3/8" |
| Wall Thimble | 11 3/8" | 12 3/8" | 13 3/8" | 14 3/8" | 16 3/8" |
| Firestop | 11 3/8" | 12 3/8" | 13 3/8" | 14 3/8" | 16 3/8" |
| Cathedral Support | -- | 12 3/8" | 14 3/8" | 14 3/8" | -- |
| Reduced Clearance Support | -- | 10 1/8" | 11 1/8" | 12 1/8" | -- |

Planning Your Installation

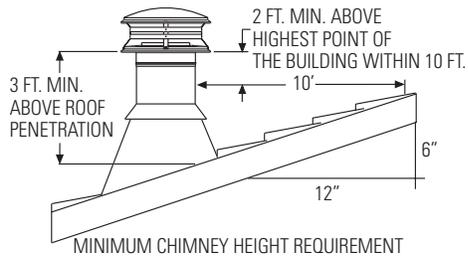


Figure 1

The following recommendations are a general guideline to assist in the layout and selection of the chimney components needed for your installation. Always follow DuraVent Installation instructions when installing your chimney system (enclosed with any support). Installation instructions can be viewed online at www.duravent.com.

- The diameter of the chimney should match the outlet size of the appliance. An improperly sized chimney results in poor draft and excessive creosote formation.
- Measure the diameter of the appliance flue outlet. Select the chimney and either DVL, DDW, or DuraBlack connector stovepipe with the same size diameter as the appliance flue outlet.
- Determine if the installation is a through-the-roof installation or a through-the-wall installation. A through-the-wall installation will require additional components (Wall Thimble, Tee/Cap, Tee Support, Wall Bands, Flue Extension, and Decorative Collar).
- Install the chimney in the interior of the structure whenever possible. A cold exterior chimney will produce less draft and will generate more creosote.
- If possible avoid offsets that serve to restrict the natural draft. A straight vertical installation is more efficient and less likely to develop creosote. If an offset is required to avoid rafters or other obstructions, measure the horizontal distance required and the vertical height available. 15°, 30° and 45° elbows are available. (Note: 45° elbows are only allowed in Canada. The maximum angle allowed in the U.S. is 30°.) A maximum of two offsets (four elbows) in a single installation are permitted. At least one suitable support if required for each offset.
- Determine the minimum chimney height above the roof line. Building codes require a minimum of 3' above the roof penetration and at least 2' higher than any portion of a building within 10'. See Figure 1. The termination cap is installed above that point. If chimney is more than 5' above the roof penetration a Roof Brace is required.
- Measure the roof pitch. For example, a 6/12 pitch has a vertical rise of 6" over a horizontal distance of 12". Select the appropriate flashing.
- Determine the total length of chimney and stovepipe required for the installation. To calculate the installed length of 6"-8" DuraTech Canada chimney pipe, subtract 1 1/4" per joint. Subtract 1 1/4" per joint of DuraBlack stovepipe. Subtract 3/4" per joint of DVL or 1 7/8" of DDW stovepipe. Minimum chimney height, at sea level, of straight vertical chimney, is 10' to 15' above the appliance outlet. Higher elevations, or the use of elbows or a tee, will require approximately 30% to 60% more height to provide for an adequate draft.
- Be fire safe. Maintain at least 2" clearance to combustibles. Follow local building codes and have your chimney inspected by a certified professional.

Wall Support Kit



Through-Wall Option #1: Kit includes: Insulated Wall Thimble, Tee, Twist-Lock Tee Cap, Wall Support, Wall Band, Flue Extension, Decorative Collars for both DVL and DDW stove pipe, and Vertical Cap.

With this option, Tee can be positioned above or below Wall Support.

| | |
|---------|------------|
| SIZE | 6" |
| ORDER # | 6DTC-WSK-2 |
| STOCK # | 810017215 |

Exterior Kit



Through-Wall Option #2: Kit includes: Insulated Wall Thimble, Tee, Twist-Lock Tee Cap, Tee Support with Coupler, Wall Band, Flue Extension, Decorative Collars for both DVL and DDW stove pipe, Vertical Cap, and Spark Arrester.

With this option, Tee is positioned on top of Tee Support.

| | |
|---------|-------------|
| SIZE | 6" |
| ORDER # | 6DTC-KTTW-2 |
| STOCK # | 810017197 |


Interior Kit



Kit includes: Round Finishing Support with removable trim collar, Adjustable Attic Radiation Shield, and Vertical Cap.

| | |
|---------|-----------|
| SIZE | 6" |
| ORDER # | 6DTC-KINC |
| STOCK # | 810012705 |

Pipe Length

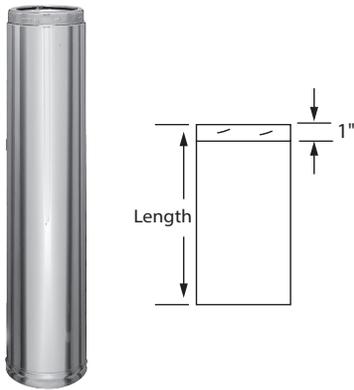


Available in sizes from 5 - to 10-inch diameters, the DuraTech Canada line offers double-wall, 1-inch insulated chimneys. Lengths twist-lock together with just an 1/8th rotation.

| SIZE | | 5" | | 6" | | 7" | |
|-----------------------|------------------|-------------|-----------|-------------|-----------|-------------|-----------|
| Weight per foot (lbs) | | 4.1 | | 5.2 | | 6.4 | |
| LENGTH | EFFECTIVE LENGTH | ORDER # | STOCK # | ORDER # | STOCK # | ORDER # | STOCK # |
| 8" | 6 3/4" | 5DTC-08SS-2 | 810017152 | 6DTC-08SS-2 | 810017146 | 7DTC-08SS-2 | 810017140 |
| 12" | 10 3/4" | 5DTC-12SS-2 | 810017157 | 6DTC-12SS-2 | 810017151 | 7DTC-12SS-2 | 810017145 |
| 18" | 16 3/4" | 5DTC-18SS-2 | 810017156 | 6DTC-18SS-2 | 810017150 | 7DTC-18SS-2 | 810017144 |
| 24" | 22 3/4" | 5DTC-24SS-2 | 810017155 | 6DTC-24SS-2 | 810017149 | 7DTC-24SS-2 | 810017143 |
| 36" | 34 3/4" | 5DTC-36SS-2 | 810017154 | 6DTC-36SS-2 | 810017148 | 7DTC-36SS-2 | 810017142 |
| 48" | 46 3/4" | 5DTC-48SS-2 | 810017153 | 6DTC-48SS-2 | 810017147 | 7DTC-48SS-2 | 810017141 |

| SIZE | | 8" | | 10" | |
|-----------------------|------------------|-------------|-----------|--------------|-----------|
| Weight per foot (lbs) | | 7.2 | | 8.9 | |
| LENGTH | EFFECTIVE LENGTH | ORDER # | STOCK # | ORDER # | STOCK # |
| 8" | 6 3/4" | 8DTC-08SS-2 | 810017134 | 10DTC-08SS-2 | 810017163 |
| 12" | 10 3/4" | 8DTC-12SS-2 | 810017139 | 10DTC-12SS-2 | 810017162 |
| 18" | 16 3/4" | 8DTC-18SS-2 | 810017138 | 10DTC-18SS-2 | 810017161 |
| 24" | 22 3/4" | 8DTC-24SS-2 | 810017137 | 10DTC-24SS-2 | 810017160 |
| 36" | 34 3/4" | 8DTC-36SS-2 | 810017136 | 10DTC-36SS-2 | 810017159 |
| 48" | 46 3/4" | 8DTC-48SS-2 | 810017135 | 10DTC-48SS-2 | 810017158 |

Adjustable Pipe Length

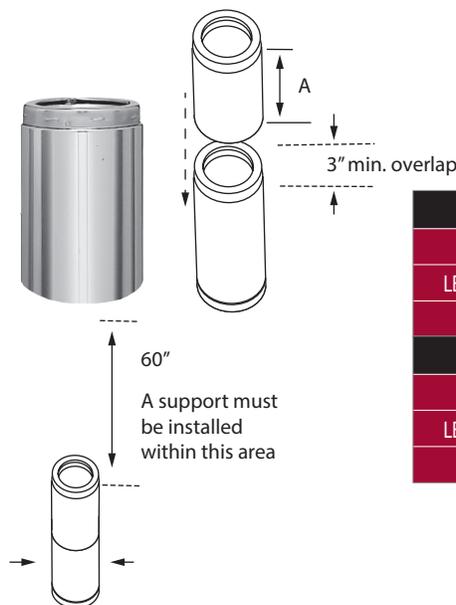

Used in combination with straight insulated lengths, the adjustable length makes it possible to fit a length perfectly, either vertically, horizontally, or at an angle.

IMPORTANT: The adjustable length is not designed as a load bearing component. Its vertical installation requires an appropriate support on the section above it to bear the weight of the remaining installation.

| SIZE | | 5" | | 6" | | 7" | |
|--------|---------------|-----------|---------------|-----------|---------------|-----------|--|
| A | | 11 1/4" | | 11 1/4" | | 11 1/4" | |
| LENGTH | ORDER # | STOCK # | ORDER # | STOCK # | ORDER # | STOCK # | |
| 12" | 5DTC-12TASS-2 | 810017201 | 6DTC-12TASS-2 | 810017200 | 7DTC-12TASS-2 | 810017199 | |

| SIZE | | 8" | | 10" | |
|--------|---------------|-----------|----------------|-----------|--|
| A | | 11 1/4" | | 11 1/4" | |
| LENGTH | ORDER # | STOCK # | ORDER # | STOCK # | |
| 12" | 8DTC-12TASS-2 | 810017198 | 10DTC-12TASS-2 | 810017202 | |

15° Elbow



Use to offset chimney around obstacles such as a joist or truss. A maximum of two offsets (4 elbows) is permitted. Each elbow is sold individually.

| SIZE | 5" | 6" | 7" | 8" | 10" |
|---------|--------------|--------------|--------------|--------------|---------------|
| A | 1/2" | | | | |
| B | 4 1/2" | | | | |
| ORDER # | 5DTC-E15SS-2 | 6DTC-E15SS-2 | 7DTC-E15SS-2 | 8DTC-E15SS-2 | 10DTC-E15SS-2 |
| STOCK # | 810017185 | 810017182 | 810017179 | 810017176 | 810017188 |


30° Elbow



Use to offset chimney around obstacles such as a joist or truss. A maximum of two offsets (4 elbows) is permitted. Each elbow is sold individually.

| SIZE | 5" | 6" | 7" | 8" | 10" |
|---------|--------------|--------------|--------------|--------------|---------------|
| A | 2" | | | | |
| B | 7 1/2" | | | | |
| ORDER # | 5DTC-E30SS-2 | 6DTC-E30SS-2 | 7DTC-E30SS-2 | 8DTC-E30SS-2 | 10DTC-E30SS-2 |
| STOCK # | 810017184 | 810017181 | 810017178 | 810017175 | 810017187 |


45° Elbow

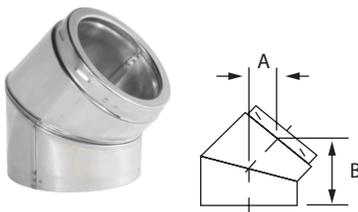

Use to offset chimney around obstacles such as a joist or truss. A maximum of two offsets (4 elbows) is permitted. Each elbow is sold individually. **For use in Canada only.**

| SIZE | 5" | 6" | 7" | 8" | 10" |
|---------|--------------|--------------|--------------|--------------|---------------|
| A | 3" | | | | |
| B | 6 7/8" | | | | |
| ORDER # | 5DTC-E45SS-2 | 6DTC-E45SS-2 | 7DTC-E45SS-2 | 8DTC-E45SS-2 | 10DTC-E45SS-2 |
| STOCK # | 810017183 | 810017180 | 810017177 | 810017174 | 810017186 |

Tee

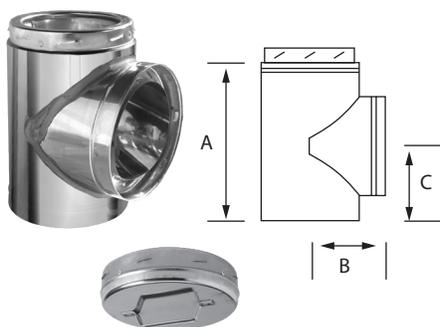

Located at the base of the chimney, it provides the horizontal connection to the appliance. An insulated Tee Cap (TCI) is included.

| SIZE | 5" | 6" | 7" | 8" | 10" |
|---------|------------|------------|------------|------------|-------------|
| A | 9 1/2" | 10 1/2" | 11 3/4" | 13" | 15" |
| B | 4 3/4" | 5 1/4" | 5 1/4" | 6 1/4" | 7 1/4" |
| C | 5 1/2" | 6" | 6 1/2" | 7 1/4" | 8 1/4" |
| ORDER # | 5DTC-TSS-2 | 6DTC-TSS-2 | 7DTC-TSS-2 | 8DTC-TSS-2 | 10DTC-TSS-2 |
| STOCK # | 810017167 | 810017166 | 810017165 | 810017164 | 810017168 |

Tee Cap (Twist-Lock)



The twist-lock cap makes inspection access and servicing easy.

| SIZE | 5" | 6" | 7" | 8" | 10" |
|---------|-----------|-----------|-----------|-----------|-----------|
| ORDER # | 5DTC-TCI | 6DTC-TCI | 7DTC-TCI | 8DTC-TCI | 10DTC-TCI |
| STOCK # | 810007717 | 810007721 | 810007787 | 810007848 | 810013654 |

Flue Extension



Used to make the transition from insulated chimney to stovepipe in a through-the-wall installation. Refer to installation instructions for more details.

| SIZE | 5" | 6" | 7" | 8" | 10" |
|---------|-----------|-----------|-----------|-----------|-----------|
| A | 3" | | | | |
| B | 5" | 6" | 7" | 8" | 10" |
| ORDER # | 5DTC-CA | 6DTC-CA | 7DTC-CA | 8DTC-CA | 10DTC-CA |
| STOCK # | 810017195 | 810017193 | 810017192 | 810017191 | 810017194 |


Insulated Reduced Clearance Support box



Use to support chimney with flat, vaulted, or cathedral ceiling. Certified to reduce clearances from 2" to just 1" for any portion of chimney shielded within the support's box. Note: Any exposed chimney above the support still requires minimum 2" clearances-to-combustibles. Reduced clearance allows for smaller opening & frame within ceiling. Support can also serve as the Attic Radiation Shield. Includes top collar as shown, insulation, and two-piece adjustable black finish trim. Integrated adapter accepts either single-wall or double-wall stovepipe.

| SIZE | 6" | 7" | 8" |
|---------|-----------|-----------|-----------|
| A | 6" | 7" | 8" |
| B | 10" | 11" | 12" |
| C | 24" | | |
| D | 2" | | |
| ORDER # | 6DTC-RCS | 7DTC-RCS | 8DTC-RCS |
| STOCK # | 810013790 | 810013791 | 810013792 |

Reduced Clearance Support Extension




This part is designed to extend the height of the Insulated Reduced Clearance Support by 22" when additional height is required.

Note: Not compatible with DTC-CS24 cathedral support.

| SIZE | 6" | 7" | 8" |
|---------|-----------|-----------|-----------|
| A | 10" | 11" | 12" |
| B | 24" | 24" | 24" |
| ORDER # | 6DTC-SE | 7DTC-SE | 8DTC-SE |
| STOCK # | 810013793 | 810013794 | 810013795 |

Square Cathedral Ceiling Support




Support for use with vaulted or cathedral ceilings. 6" version fits within 12" x 12" frame. Larger 7" and 8" versions will fit within frame between 16"-on-centre construction. Includes two-piece adjustable black finish trim. Integrated adapter accepts both single-wall or double-wall stovepipe.

Note: Where attic is located immediately above this support, an attic radiation shield is required.

| SIZE | 6" | 7" | 8" |
|---------|-----------|-----------|-----------|
| A | 6" | 7" | 8" |
| B | 12" | 12" | 12" |
| C | 24" | | |
| D | 2" | | |
| ORDER # | 6DTC-CS24 | 7DTC-CS24 | 8DTC-CS24 |
| STOCK # | 810013264 | 810013265 | 810013266 |


Square Cathedral Ceiling Support Extension



Use to extend the height of the Cathedral Support by up to 22".

| SIZE | 6" | 7" | 8" |
|---------|------------|----------------------------------|----|
| A | 12" | 14 ³ / ₈ " | |
| B | 24" | | |
| ORDER # | 6DTC-CSE24 | CSE24 | |
| STOCK # | 810013267 | 810017125 | |


Round Finishing Support w/ Removable Trim



Round Finishing Support for use on flat ceiling. 6" diameter only. Fits within 12-3/8" x 12-3/8" frame. Integrated adapter accepts either singlewall or double-wall stovepipe. Removable trim collar allows collar to be fastened in place after finish of ceiling is completed.

| SIZE | 5" | 6" |
|---------|-----------|-----------|
| A | 12" | |
| B | 5 1/4" | 6" |
| C | 20" | |
| D | 5 1/2" | |
| E | 3" | |
| F | 2" | |
| ORDER # | 5DTC-FSCR | 6DTC-FSCR |
| STOCK # | 810007686 | 810007732 |


Round Finishing Support



Same as above except collar is fixed; not removable. Integrated adapter accepts either single-wall or double-wall stovepipe.

| SIZE | 5" | 6" | 7" | 8" |
|---------|-----------|-----------|-----------|-----------|
| A | 12" | 12" | 14 3/8" | 14 3/8" |
| B | 5 1/4" | 6" | 7" | 8" |
| C | 17" | | 20" | |
| D | 5 1/2" | | | |
| E | 3" | | | |
| F | 2" | | | |
| ORDER # | 5DTC-FSC | 6DTC-FSC | 7DTC-FSC | 8DTC-FSC |
| STOCK # | 810007685 | 810007731 | 810007794 | 810007855 |


Adjustable Tee Support



Use to support insulated tee on though-wall chimney installation. For installation versatility and convenience, tee can be placed above or below the support. Can also be used as a wall support or re-support. Adjustable arms and sliding base plate are factory-set to ensure minimum clearance of 2". Allows for 2" - 7" clearance to combustibles.

| SIZE | 5" | 6" | 7" | 8" | 10" |
|---------|-----------|-----------|-----------|-----------|-----------|
| A | 13" | 13" | 13" | 13" | 16" |
| B | 16" | | | | |
| C | 26 3/4" | | | | |
| D | 0" to 5" | | | | |
| ORDER # | 5DTC-TSA | 6DTC-TSA | 7DTC-TSA | 8DTC-TSA | 10DTC-TSA |
| STOCK # | 810007687 | 810007736 | 810007798 | 810007859 | 810013657 |


Adjustable Tee Support with Coupler

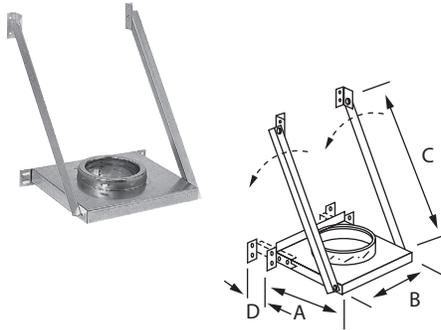

Use to support insulated tee on though-wall chimney installation. Access for inspection and service is incorporated from the underside of this support. Adjustable arms and sliding base plate are factory-set to ensure minimum clearance of 2". Allows for 2" - 7" clearance to combustibles.

| SIZE | 5" | 6" | 7" | 8" | 10" |
|---------|-------------|-------------|-------------|-------------|--------------|
| A | 11 1/2" | 11 1/2" | 11 1/2" | 11 1/2" | 11 1/2" |
| B | 15" | | | | |
| C | 26 3/4" | | | | |
| D | 0" to 5" | | | | |
| ORDER # | 5DTC-TSAC-2 | 6DTC-TSAC-2 | 7DTC-TSAC-2 | 8DTC-TSAC-2 | 10DTC-TSAC-2 |
| STOCK # | 810017206 | 810017205 | 810017204 | 810017203 | 810017207 |


Re-Support (UNIVERSAL)

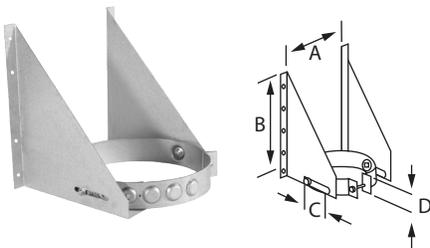

Use to support the chimney on a vertical wall. The triangular plates allow for a 2 3/4" adjustment of the support to the vertical surface. This support can also be used as a wall support above the insulated tee or as a support for an offset elbow. Refer to chart for load bearing capacity. In shorter chimney stack applications, the Wall-Support can also be used in place of a Tee Support. Universal design works with 5", 6", 7", or 8" pipe diameters.

| SIZE | 5" | 6" | 7" | 8" | 10" |
|---------|------------|--------|---------|--------------|---------|
| A | 8 1/2" | 9 1/2" | 10 1/2" | 11 1/2" | 13 1/2" |
| B | 12" | | | | |
| C | 2 3/4" | | | | |
| D | 2" | | | | |
| ORDER # | DTC-RESU-2 | | | 10DTC-RESU-2 | |
| STOCK # | 810017132 | | | 810017133 | |


Roof Support (UNIVERSAL)

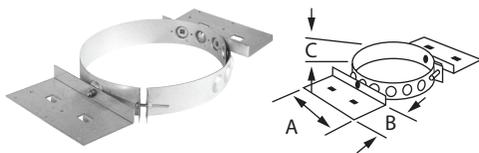

The roof support is versatile. A universal collar allows it to fit 5", 6", 7" and 8" chimney. It is typically used to support a chimney at the roof-deck. The mounting brackets easily adjust to suit any pitch. It can also be used as a re-support when placed upon a floor or mounted to a ceiling; or as offset support. Please refer to instructions for more details.

| SIZE | 5" | 6" | 7" | 8" | 10" |
|---------|-----------|----|----|-----------|-----|
| A | 8" | | | | |
| B | 4" | | | | |
| C | 2" | | | | |
| ORDER # | DTC-RS | | | 10DTC-RS | |
| STOCK # | 810007738 | | | 810013652 | |


Floor Support Plate

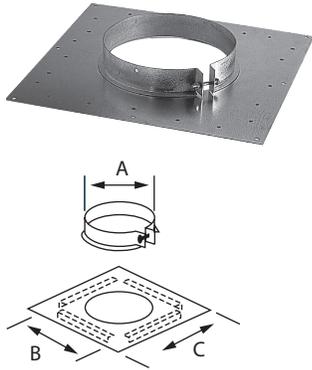

Use to support the chimney on a slab, floor, or joist. It includes a tightening collar that locks around the chimney and is secured by self-tapping screws (included). The collar rests on a horizontal plate screwed or nailed to the floor or slab. It can also serve as an intermediate support. Refer to chart for load bearing capacity.

| SIZE | 5" | 6" | 7" | 8" | 10" |
|---------|-----------|-----------|-----------|-----------|-----------|
| A | 7" | 8" | 9" | 10" | 12" |
| B | 11" | 12" | 13" | 14" | 20" |
| C | 16" | 16" | 16" | 18" | 18" |
| ORDER # | 5DTC-FSP | 6DTC-FSP | 7DTC-FSP | 8DTC-FSP | 10DTC-FSP |
| STOCK # | 810007690 | 810007739 | 810007801 | 810007862 | 810013648 |


Anchor Plate



Attach to a masonry or factory-built fireplace to provide proper connection to the chimney. The Anchor Plate can also be used with furnaces or boilers.

| SIZE | 5" | 6" | 7" | 8" | 10" |
|---------|-----------|-----------|-----------|-----------|-----------|
| A | 5" | 6" | 7" | 8" | 10" |
| B | 12" | | | | 14" |
| C | 2" | | | | |
| D | 3" | | | | |
| ORDER # | 5DTC-AP | 6DTC-AP | 7DTC-AP | 8DTC-AP | 10DTC-AP |
| STOCK # | 810007691 | 810007740 | 810007802 | 810007863 | 810013634 |


IHP Adapter



Adapt IHP fireplaces to allow connection to DuraVent's DuraTech® Canada Chimney.

| SIZE | 6" | 7" |
|---------|-------|-------|
| ORDER # | 6IHP1 | 7IHP1 |

Pass-Through Radiation Shield

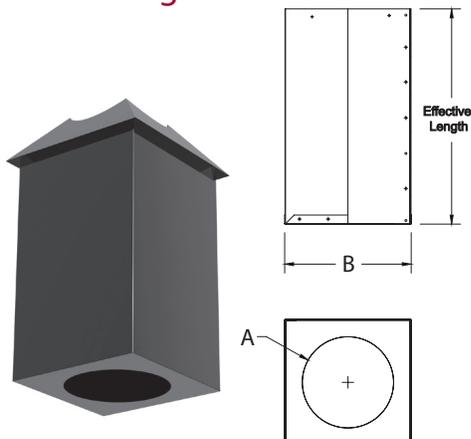


Use when insulated chimney passes up through a ceiling penetration from below. Suited for flat, vaulted, or cathedral applications. Integrated Firestop on bottom. Top can serve as an Attic Radiation Shield where required.

Factory insulation and square-to-round collar are included. Effective height (length) with standard extension is adjustable from 24" up to maximum of 46".

| SIZE | 6" | 7" | 8" |
|---------|-----------|-----------|-----------|
| A | 8 1/4" | 9 1/4" | 10 1/4" |
| B | 12" x 12" | 13" x 13" | 14" x 14" |
| ORDER # | 6DTC-SRSE | 7DTC-SRSE | 8DTC-SRSE |
| STOCK # | 810014462 | 810014463 | 810014464 |


Firestop



Use below each combustible floor the chimney passes through.

| SIZE | 5" | 6" | 7" | 8" | 10" |
|---------|-----------|-----------|-----------|-----------|-----------|
| A | 14" | 16" | 16" | 16" | 18" |
| B | 11" | 12" | 13" | 14" | 16" |
| ORDER # | 5DTC-FS | 6DTC-FS | 7DTC-FS | 8DTC-FS | 10DTC-FS |
| STOCK # | 810007692 | 810007741 | 810007803 | 810007864 | 810013645 |


Firestop Radiation Shield

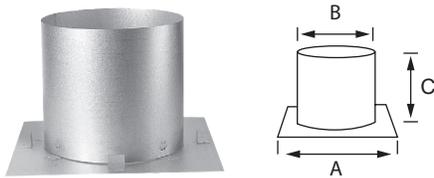

Can be used as alternative to the standard FS firestop. This version includes radiation shield. May be required by some appliance manufacturers.

| SIZE | 5" | 6" | 7" | 8" | 10" |
|---------|-----------|-----------|-----------|-----------|-----------|
| A | 16" | | | | |
| B | 10" | 11" | 12" | 13" | 15" |
| C | 10" | | | | |
| ORDER # | 5DTC-FRS | 6DTC-FRS | 7DTC-FRS | 8DTC-FRS | 10DTC-FRS |
| STOCK # | 810007693 | 810007744 | 810007806 | 810007867 | 810013644 |


Adjustable Insulated Attic Radiation Shield

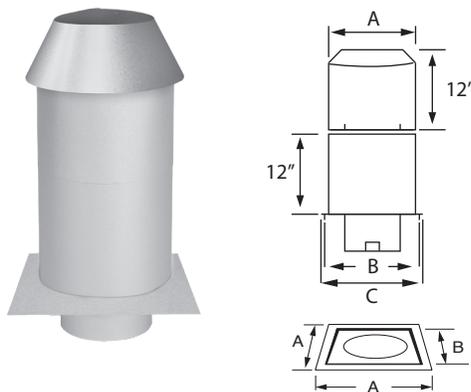

Two-piece overlapping design adjusts from 12" up to 22" height to accommodate deeper levels of insulation. Part is factory-insulated and includes both the base plate and collar as shown.

| SIZE | 5" | 6" | 7" | 8" | 10" |
|---------|-----------|-----------|-----------|-----------|------------|
| A | 11" | 12" | 13" | 14" | 16" |
| B | 11" | 12" | 13" | 14" | 16" |
| C | 16" | | | | |
| ORDER # | 5DTC-ISIA | 6DTC-ISIA | 7DTC-ISIA | 8DTC-ISIA | 10DTC-ISIA |
| STOCK # | 810007697 | 810007746 | 810007808 | 810007869 | 810013651 |


Wall Thimble

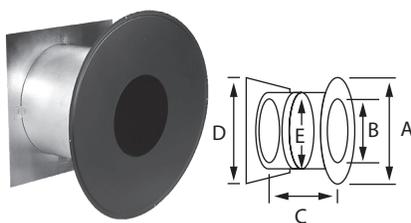

Designed to protect surrounding combustible materials when a chimney passes through a wall. Thimble works with wall thicknesses from 7" up to 12-1/2". Can be trimmed for use with thinner walls. Includes painted Decorative Collar for interior finish. Insulated to prevent heat loss or cold air intrusion.

| SIZE | 5" | 6" | 7" | 8" | 10" |
|---------|-------------------|------------|------------|------------|-------------|
| A | 17" | 17" | 20" | 20" | 20" |
| B | 7 1/4" | 8 1/4" | 9 1/4" | 10 1/4" | 12 1/4" |
| C | 7 1/2" to 12 1/2" | | | | |
| D | 14" | 16" | | | 18" |
| E | 11" | 12" | 13" | 14" | 16" |
| ORDER # | 5DTC-WTI-2 | 6DTC-WTI-2 | 7DTC-WTI-2 | 8DTC-WTI-2 | 10DTC-WTI-2 |
| STOCK # | 810017172 | 810017171 | 810017170 | 810017169 | 810017173 |



Wall Radiation Shield - 30°



This part is to be used only with a wood-burning fireplace that has been certified for use with the chimney. It has been designed for use when the chimney passes through a wall at an angle.

| SIZE | 6" | 7" | 8" | 10" |
|---------|-------------|-------------|-------------|--------------|
| A | 34 3/4" | 37 1/4" | 39 1/4" | 42 3/4" |
| B | 15 1/8" | 16 1/8" | 17 1/8" | 18 7/8" |
| C | 11" | 12" | 13" | 14 3/4" |
| D | 30 5/8" | 33 1/8" | 35 1/8" | 38 3/4" |
| E | 3" | | | |
| ORDER # | 6DTC-WRSI30 | 7DTC-WRSI30 | 8DTC-WRSI30 | 10DTC-WRSI30 |
| STOCK # | 810007749 | 810007811 | 810007872 | 810013661 |


Wall Radiation Shield - 45°



This part is to be used only with a wood-burning fireplace that has been certified for use with the chimney. It has been designed for use when the chimney passes through a wall at an angle.

| SIZE | 6" | 7" | 8" | 10" |
|---------|-------------|-------------|-------------|--------------|
| A | 24 3/8" | 26 1/8" | 27 1/2" | 30" |
| B | 15 1/8" | 16 1/8" | 17 1/8" | 18 7/8" |
| C | 11" | 12" | 13" | 14 3/4" |
| D | 20 1/4" | 22" | 23 3/8" | 25 7/8" |
| E | 3" | | | |
| ORDER # | 6DTC-WRSI45 | 7DTC-WRSI45 | 8DTC-WRSI45 | 10DTC-WRSI45 |
| STOCK # | 810007750 | 810007812 | 810007873 | 810013662 |


Angled Firestop - 30°



For use with factory-built fireplaces certified with DuraTech Canada.

| SIZE | 6" | 7" | 8" | 10" |
|---------|-----------|-----------|-----------|------------|
| A | 15 5/8" | 16 5/8" | 17 5/8" | 19 3/8" |
| B | 35 1/4" | 37 3/4" | 39 3/4" | 43 5/16" |
| C | 13 5/16" | 14 9/16" | 15 9/16" | 17 3/8" |
| ORDER # | 6DTC-FS30 | 7DTC-FS30 | 8DTC-FS30 | 10DTC-FS30 |
| STOCK # | 810007742 | 810007804 | 810007865 | 810013646 |


Angled Firestop - 45°



For use with factory-built fireplaces listed with DuraTech Canada.
For use in Canada only.

| SIZE | 6" | 7" | 8" | 10" |
|---------|-----------|-----------|-----------|------------|
| A | 15 5/8" | 16 5/8" | 17 5/8" | 19 3/8" |
| B | 24 7/8" | 26 5/8" | 28" | 30 1/2" |
| C | 9 15/16" | 10 13/16" | 11 1/2" | 12 3/4" |
| ORDER # | 6DTC-FS45 | 7DTC-FS45 | 8DTC-FS45 | 10DTC-FS45 |
| STOCK # | 810007743 | 810007805 | 810007866 | 810013647 |

Roof Brace (UNIVERSAL)

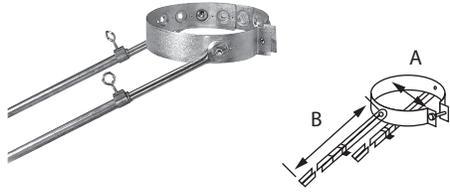


Required to stabilize chimney against wind-loading when 5 feet or more extends above the roof-line. Adjustable collar works with 5", 6", 7", or 8" pipe. Brace arms are adjustable from 60" up to 115".

Note: Not intended to provide protection against sliding ice or snow on a metal roof.

| SIZE | 5" | 6" | 7" | 8" | 10" |
|---------|-----------|----|----|-----------|-----|
| A | 7" | 8" | 9" | 10" | 12" |
| B | 60" | | | | |
| ORDER # | DTC-XRB | | | 10DTC-XRB | |
| STOCK # | 810007698 | | | 810013665 | |

Universal Wall Strap




Use to provide lateral stability when chimney runs up an interior or exterior wall. Adjustable arms slide in or out to set required clearances. Adjustable collar works with 5", 6", 7", or 8" pipe.

Note: The use of wall bands at intervals of 8' is recommended.

| SIZE | 5" | 6" | 7" | 8" | 10" |
|---------|-----------|-----|-----|-------------|-----|
| A | 7" | 8" | 9" | 10" | 12" |
| B | 19" | 21" | 23" | 25" | 29" |
| C | 2" | | | | |
| ORDER # | DTC-WSU-2 | | | 10DTC-WSU-2 | |
| STOCK # | 810017123 | | | 810017122 | |


Guy Wire Band



Can be used to provide added stability to a chimney that protrudes from 5' up to 13' above a roof. Collar includes three eyelets for attaching wire rope (rope not included). Note: Not intended to provide protection from sliding ice & snow.

| SIZE | 6" | 7" | 8" | 10" |
|---------|-----------|-----------|-----------|-----------|
| A | 2" | | | |
| ORDER # | 6DTC-GWB | 7DTC-GWB | 8DTC-GWB | 10DTC-GWB |
| STOCK # | 810007751 | 810007814 | 810007874 | 810013649 |


Flat Roof Flashing



Galvanized Flat Roof Flashing. Storm collar included.

| SIZE | 5" | 6" | 7" | 8" | 10" |
|---------|-----------|-----------|-----------|-----------|-----------|
| A | 7 1/2" | | | | |
| B | 20" | 24" | | | |
| ORDER # | 5DTC-FF | 6DTC-FF | 7DTC-FF | 8DTC-FF | 10DTC-FF |
| STOCK # | 810007700 | 810007758 | 810007821 | 810007881 | 810013641 |


Adjustable Roof Flashing



Galvanized Adjustable Roof Flashing. Choose from three different versions to match roof pitch. Storm collar is included.

| SIZE | | 5" | 6" | 7" | 8" | 10" |
|---------------|---------|-----------|-----------|-----------|-----------|-----------|
| 1/12 - 7/12 | A | 6" | | | | |
| | B | 24" | | | | |
| | ORDER # | 5DTC-F7 | 6DTC-F7 | 7DTC-F7 | 8DTC-F7 | 10DTC-F7 |
| | STOCK # | 810007701 | 810007759 | 810007822 | 810007882 | 810013640 |
| 8/12 - 12/12 | A | 6" | 4 3/8" | 3 7/8" | 3 7/8" | |
| | B | 24" | | | | 30" |
| | ORDER # | 5DTC-F12 | 6DTC-F12 | 7DTC-F12 | 8DTC-F12 | 10DTC-F12 |
| | STOCK # | 810007702 | 810007760 | 810007823 | 810007883 | 810013638 |
| 12/12 - 21/12 | A | -- | 6 1/4" | | | |
| | B | -- | 36" | | 42" | |
| | ORDER # | -- | 6DTC-F21 | 7DTC-F21 | 8DTC-F21 | 10DTC-F21 |
| | STOCK # | -- | 810007761 | 810007824 | 810007884 | 810013639 |


DSA Roof Flashing



This flashing features a base plate made of malleable (aka "Dead-Soft") aluminum. This material is easily shaped-by-hand to match corrugated metal roofing or rounded clay-tile shingles. Storm Collar is included.

| SIZE | | 6" | 7" | 8" |
|---------------------------------------|---------|-------------|-------------|-------------|
| 1/12 - 7/12 Aluminum Malleable | A | 6" | | |
| | B | 36" | | |
| | ORDER # | 6DTC-F7DSA | 7DTC-F7DSA | 8DTC-F7DSA |
| | STOCK # | 810007764 | 810007827 | 810007942 |
| 8/12 - 12/12 Aluminum Malleable | A | 6" | 6 3/8" | 6 7/8" |
| | B | 36" | | |
| | ORDER # | 6DTC-F12DSA | 7DTC-F12DSA | 8DTC-F12DSA |
| | STOCK # | 810007765 | 810007828 | 810007887 |

Peak Roof Flashing



Galvanized Peak Roof Flashing. Choose from two different versions to match roof pitch. Storm collar included.

| SIZE | | 6" | 7" | 8" | 10" |
|--------------|---------|-----------|-----------|-----------|------------|
| 1/12 - 7/12 | A | 3 5/8" | | | |
| | B | 12" | 13" | 13 1/2" | 15" |
| | ORDER # | 6DTC-FP7 | 7DTC-FP7 | 8DTC-FP7 | 10DTC-FP7 |
| | STOCK # | 810007762 | 810007825 | 810007885 | 810013643 |
| 8/12 - 12/12 | A | 5" | 4" | 3 1/4" | 1 1/2" |
| | B | 14" | | | |
| | ORDER # | 6DTC-FP12 | 7DTC-FP12 | 8DTC-FP12 | 10DTC-FP12 |
| | STOCK # | 810007763 | 810007826 | 810007886 | 810013642 |


Storm Collar



Collar fits over flashings to help prevent water intrusion. Generous shoulder width ensures effective protection in all climates when installed as directed. **Included with all roof flashing.** Same collar is also used with Attic Radiation Shields and Premium Shields.

| SIZE | 5" | 6" | 7" | 8" | 10" |
|---------|-----------|-----------|-----------|-----------|-----------|
| A | 5" | | | | |
| ORDER # | 5DTC-SC | 6DTC-SC | 7DTC-SC | 8DTC-SC | 10DTC-SC |
| STOCK # | 810007703 | 810007766 | 810007829 | 810007888 | 810013653 |


Snow Splitter (UNIVERSAL)

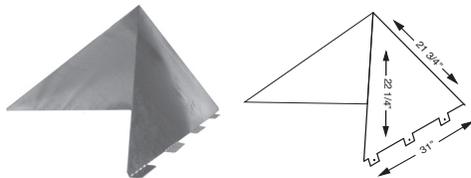

Ships flat, and folds easily on the job site. Includes 8 fastening flanges (4 on each side) for mounting. Made with heavy 14 gauge galvanized steel.

| SIZE | 5" | 6" | 7" | 8" |
|---------|-----------|----|----|----|
| ORDER # | SP | | | |
| STOCK # | 810017196 | | | |

Vertical Cap

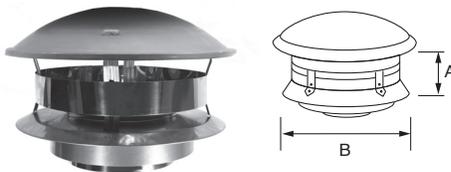


A vertical cap is required to prevent precipitation from entering the chimney. Unique clamp design allows for universal fit on any chimney with either a one-inch or two-inch wall thickness.

Note: Check local codes to determine if an optional spark arrester is required.

| SIZE | 5" | 6" | 7" | 8" | 10" |
|---------|-----------|-----------|-----------|-----------|-----------|
| A | 4 3/4" | 4 3/4" | 4 3/4" | 4 3/4" | 4 3/4" |
| B | 12 1/4" | 12 1/4" | 12 1/4" | 15 1/2" | 15 1/2" |
| ORDER # | 5VC | 6VC | 7VC | 8VC | 10VC |
| STOCK # | 810017129 | 810017128 | 810017127 | 810017126 | 810017130 |


Universal Spark Arrester Band

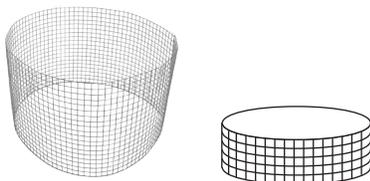

This band is wrapped around the vertical cap. Its purpose is to help prevent burning embers from escaping. As an added benefit, it keeps birds and other small animals from entering the chimney. Mesh must be cut to suit cap. Made of Stainless Steel.

| SIZE | 5" | 6" | 7" | 8" |
|---------|-----------|----|----|----|
| ORDER # | SA | | | |
| STOCK # | 810017124 | | | |


Trim Collar

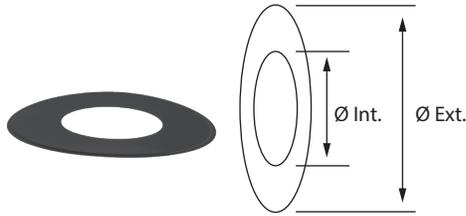

The optional decorative Trim Collar can be used to help provide a professional finish around the chimney when passing through a non-combustible wall.

| SIZE | 6" | 7" | 8" |
|------------|-----------|-----------|-----------|
| Ø INTERIOR | 8 1/8" | 9 1/8" | 10 1/8" |
| Ø EXTERIOR | 17" | 20" | 20" |
| ORDER # | 6DTC-TC | 7DTC-TC | 8DTC-TC |
| STOCK # | 810007768 | 810007831 | 810007890 |


Decorative Collar Single-Wall Stovepipe



Used in through-wall installations. Provides decorative finish with transition between chimney and single-wall stove pipe.

| SIZE | 5" | 6" | 7" | 8" |
|---------|-----------|-----------|-----------|-----------|
| A | 7" | 8" | 9" | 10" |
| B | 5 1/8" | 6 1/8" | 7 1/8" | 8 1/8" |
| C | 1" | | | |
| ORDER # | 5DTC-DC | 6DTC-DC | 7DTC-DC | 8DTC-DC |
| STOCK # | 810007707 | 810007770 | 810007834 | 810007893 |


Decorative Collar DVL Double-Wall Stovepipe



This component provides finish between the chimney and DVL double-wall stove pipe connection.

| SIZE | 6" | 7" | 8" |
|---------|-----------|-----------|-----------|
| A | 8 1/8" | 9 3/8" | 10 3/8" |
| B | 7 1/8" | 8 1/8" | 9 1/8" |
| C | 7/8" | | |
| ORDER # | 6DTC-DVL | 7DTC-DVL | 8DTC-DVL |
| STOCK # | 810014842 | 810014843 | 810014844 |


Decorative Collar DDW Double-Wall Stovepipe

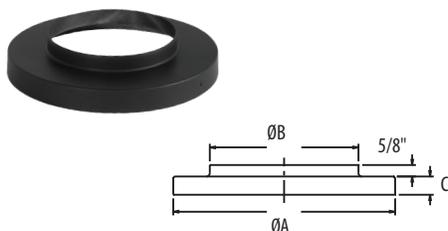

Used in through-wall installations. Provides decorative finish in transition between chimney and DDW Double-Wall stove pipe.

| SIZE Ø | 6" | 7" | 8" |
|---------|----------|----------|----------|
| A | 8 1/8" | 9 3/8" | 10 3/8" |
| B | 6 5/8" | 7 5/8" | 8 5/8" |
| C | 1 3/8" | 7/8" | 7/8" |
| ORDER # | 6DDW-QDH | 7DDW-QDH | 8DDW-QDH |


Finishing Cone



Use this optional part if desired to conceal 5" projection of horizontal chimney section within dwelling. Must be used in combination with flue extension.

| | |
|---------|-----------|
| SIZE | 6" |
| A | 12" |
| B | 6 1/4" |
| C | 5 1/2" |
| ORDER # | 6DTC-FC |
| STOCK # | 810007769 |

Offset Chart

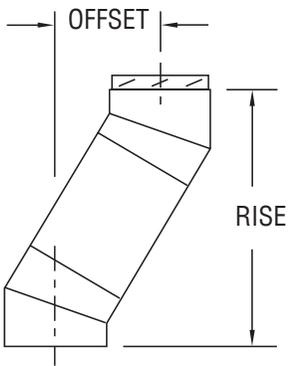

Use to determine the lengths required for an installation. Determine the offset required in view of the obstacles that must be avoided. Refer to the offset/rise chart to determine the elbows required as well as the insulated lengths needed. Check the corresponding offset height dimensions.

| ELBOW OFFSET & RISE CHART | | One length between elbows | | | | | | |
|---------------------------|------------|----------------------------|-----------|-----------|-----------|-----------|-----------|-----------|
| Angle | SIZE. | 8" | 12" | 18" | 24" | 36" | 48" | |
| 15° | 6", 7", 8" | Offset | 3 5/16" | 4 5/16" | 5 7/8" | 7 7/16" | 10 1/2" | 13 5/8" |
| | | Rise | 15 11/16" | 19 9/16" | 36 3/8" | 31 3/16" | 42 3/4" | 54 3/8" |
| | | Two lengths between elbows | | | | | | |
| 15° | 6", 7", 8" | 8" & 48" | 12" & 48" | 18" & 48" | 24" & 48" | 36" & 48" | 48" & 48" | |
| | | Offset | 15 3/8" | 16 7/16" | 18" | 19 1/2" | 25 5/8" | 25 3/4" |
| | | Rise | 60 15/16" | 64 13/16" | 70 9/16" | 76 3/8" | 87" | 99 9/16" |
| One length between elbows | | 8" | 12" | 18" | 24" | 36" | 48" | |
| 30° | 6", 7", 8" | Offset | 7 7/16" | 9 7/16" | 12 7/16" | 15 7/16" | 21 7/16" | 27 7/16" |
| | | Rise | 20" | 23 1/2" | 28 11/16" | 33 7/8" | 44 1/4" | 54 11/16" |
| | | Two lengths between elbows | | | | | | |
| 30° | 6", 7", 8" | 8" & 48" | 12" & 48" | 18" & 48" | 24" & 48" | 36" & 48" | 48" & 48" | |
| | | Offset | 30 13/16" | 32 13/16" | 35 13/16" | 38 13/16" | 44 13/16" | 50 13/16" |
| | | Rise | 60 9/16" | 64" | 69 1/4" | 74 7/16" | 84 13/16" | 95 1/4" |
| One length between elbows | | 8" | 12" | 18" | 24" | 36" | 48" | |
| 45° | 6", 7", 8" | Offset | 10 5/16" | 13 3/16" | 17 3/8" | 21 5/8" | 30 1/8" | 38 5/8" |
| | | Rise | 17 13/16" | 20 5/8" | 24 7/8" | 29 1/8" | 37 5/8" | 46 1/8" |
| | | Two lengths between elbows | | | | | | |
| 45° | 6", 7", 8" | 8" & 48" | 12" & 48" | 18" & 48" | 24" & 48" | 36" & 48" | 48" & 48" | |
| | | Offset | 43 7/16" | 46 1/4" | 50 1/2" | 54 3/4" | 63 1/4" | 71 11/16" |
| | | Rise | 50 15/16" | 53 3/4" | 58" | 62 1/4" | 70 3/4" | 79 3/16" |

DuraVent Limited Lifetime Warranty

DuraVent, Inc. ("DuraVent") provides this limited lifetime warranty for all of its products with the exception of Ventinox® (lifetime), and PolyPro® (ten years). Subject to the limitations set forth below, DuraVent warrants that its products will be free from defects in material or manufacturing, if properly installed, maintained and used. DuraVent products are fully warranted if installed only by a professional installer. This Warranty is transferable from the original homeowner to the buyer of the home. This warranty does not cover normal wear and tear, smoke damage or damage caused by chimney fires, acts of God, or any product that was: (1) purchased other than from an authorized DuraVent dealer, retailer or distributor; (2) modified or altered; (3) improperly serviced, inspected or cleaned; or (4) subject to negligence or any use not in accordance with the installation instructions included with the product as determined by DuraVent. Installation instructions are available online at www.duravent.com under Support/Literature and through our Customer Service Department 800-835-4429 or customerservice@duravent.com. This limited lifetime warranty applies only to parts manufactured by DuraVent.

DuraVent provides the following warranties for its products: One Hundred Percent (100%) MSRP 15 years from the date of purchase, and Fifty Percent (50%) thereafter, except for the following limitations on: all Termination Caps and DuraBlack® are warranted at One Hundred Percent (100%) for five years.

All warranty obligations of DuraVent shall be limited to repair or replacement of the defective product pursuant to the terms and conditions applicable to each product line. These remedies shall constitute DuraVent's sole obligation and sole remedy under this warranty. This warranty provides no cash surrender value. The terms and conditions of this warranty may not be modified, altered or waived by any action, inaction or representation, whether oral or in writing, except upon the express, written authority of an executive officer of DuraVent.

Corn, bio-fuels, driftwood or other wood containing salt, preservative-treated lumber, plastic and household trash or garbage, or wood pellets containing such materials must not be burned in the appliance or fireplace. In case of a chimney fire, the chimney must be inspected and approved by a certified Chimney Sweep before reuse. After each annual inspection, maintenance, and cleaning, the certified Chimney Sweep must fill out and date the appropriate section of the warranty card provided with the chimney liner.

LIMITATIONS ON INTERNET SALES: Notwithstanding any other terms or conditions of this Limited Lifetime Warranty, DuraVent provides no warranty for the following specific products if such products are not installed by a qualified professional installer: DuraTech®, DuraTech® DTC, DuraPlus HTC®, DuraTech® Premium, DDW®, DuraChimney®, II, DuraPlus Canada 2, PelletVent Pro®, DirectVent Pro®,

FasNSeal®, FasNSeal® W2, FasNSeal® Flex, and PolyPro®, and DuraVent's relining products including DuraLiner®, DuraFlex® (SW, Pro, 316, 304), and Ventinox®. For purposes of this warranty, a trained professional installer is defined as one of the following: licensed contractors with prior chimney installation experience, CSIA Certified Chimney Sweeps, NFI Certified Specialists, or WETT Certified Professionals.

DuraVent must be notified and given the opportunity to inspect defective product prior to replacement under the terms of this limited lifetime warranty. All warranty claims must be submitted with proof of purchase. Labor and installation costs are not covered under this warranty. To obtain warranty service contact: DuraVent Warranty Service, 877 Cotting Ct., Vacaville CA 95688, or call 800-835-4429.

WHERE LAWFUL, DURAVENT DISCLAIMS ALL OTHER WARRANTIES, INCLUDING BUT NOT LIMITED TO IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. IN NO EVENT WILL DURAVENT BE LIABLE FOR INCIDENTAL, CONSEQUENTIAL, PUNITIVE OR SPECIAL DAMAGES OR DIRECT OR INDIRECT LOSS OF ANY KIND, INCLUDING BUT NOT LIMITED TO PROPERTY DAMAGE AND PERSONAL INJURY. DURAVENT'S ENTIRE LIABILITY IS LIMITED TO THE PURCHASE PRICE OF THIS PRODUCT. SOME STATES DO NOT ALLOW LIMITATIONS ON IMPLIED WARRANTIES, OR THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATIONS AND EXCLUSIONS MAY NOT APPLY TO YOU. THIS LIMITED WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS THAT VARY FROM STATE TO STATE.

For the most up-to-date installation instructions, see www.duravent.com

DuraVent®



DuraVent[®]

