


STOVES & INSERTS



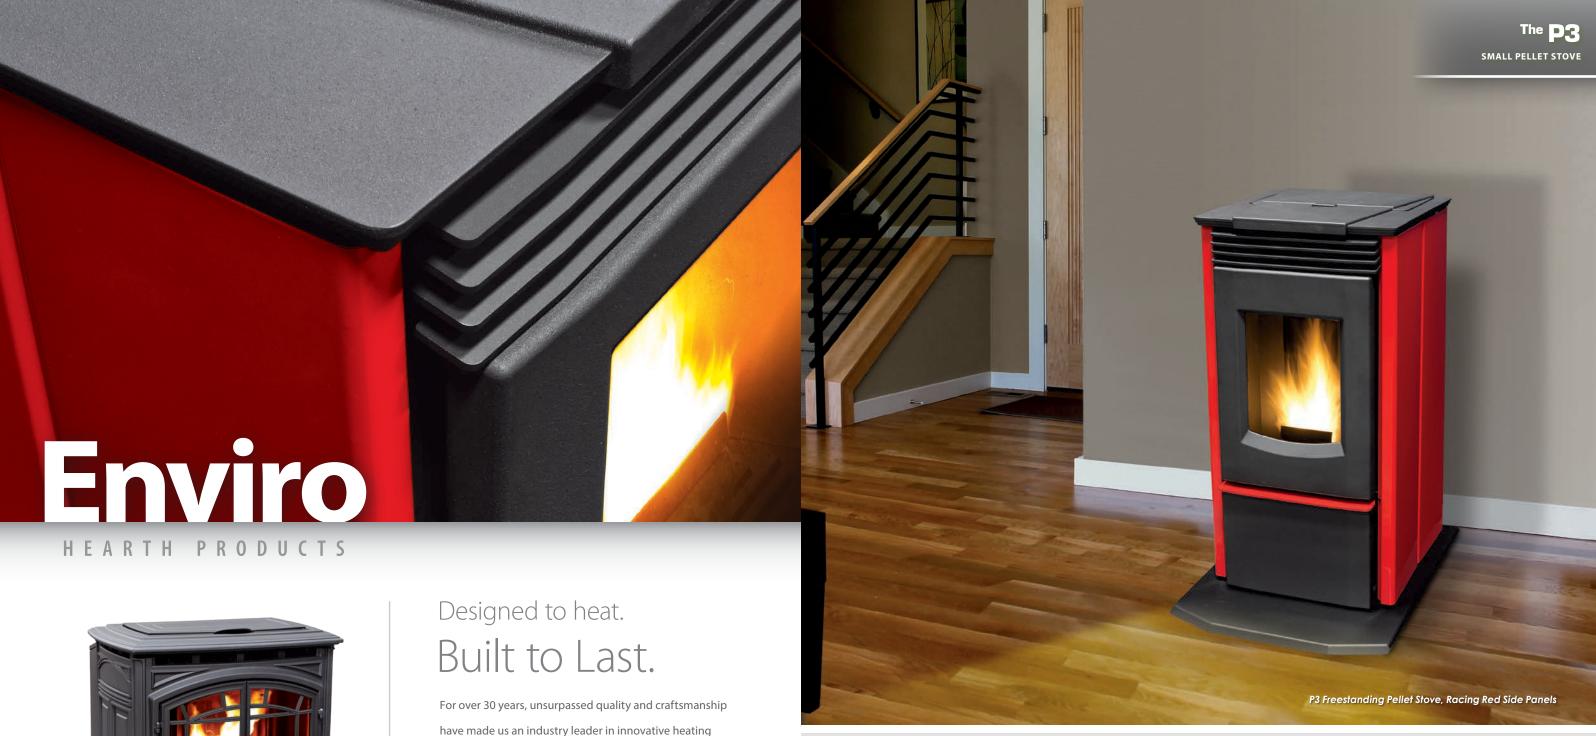


For over 30 years, unsurpassed quality and craftsmanship have made us an industry leader in innovative heating systems. Design, functionality, and efficiency merge to create exceptional products that will exceed all expectations. Whether time-honored traditional or bold and modern, our dynamic range of products will compliment any home décor. With a complete line of fireplace inserts, freestanding stoves, and multi-fuel heaters, we have the perfect solution for your heating requirements. We won't just meet your expectations; we'll exceed them...

Design Features

- LED digital controls
- "Comfort level" control system
- "Run Quiet" system
- Large viewing area (130 in²)
- Large ash pan
- Comes standard with ignitor
- Tri-mode enabled thermostat
- Heavy duty heat exchanger
- 130 CFM variable speed fan
- Painted black side panels standard
- Optional enameled side panels
- Racing Red
- Antique Ivory

Stove Details

BTU Max Input	27,700 BTU/hr					
Heating Area	1,200 ft ²					
Efficiency	66.2%					
Glass Size	130 in ²					
EPA Emissions	0.48 g/hr					
Hopper Capacity	55 lbs					
Stove Dimensions	HEIGHT WIDTH DEPTH 34" 201/2" 24"					






- Automatic controls
- "Run Quiet" system
- Large viewing area (130 in²)
- Large ash pan
- Comes with a bolt-on hearth pad
- Comes standard with ignitor
- Tri-mode enabled thermostat
- Large heat exchanger
- Leveling Legs
- 130 CFM variable speed fan

Stove Details

BTU Max Input	27,700 BTU/hr					
Heating Area	1,200 ft ²					
Efficiency	66.2%					
Glass Size	130 in ²					
EPA Emissions	0.48 g/hr					
Hopper Capacity	48 lbs					
Stove Dimensions	HEIGHT WIDTH DEPTH 34" 18" 20"					




Design Features

- Large glass size (185 in²)
- Large arched bay door
- Tri-mode enabled thermostat
- Remote thermostat compatible
- Large heat exchanger
- Large, full -pedestal ash pan
- 160 CFM variable speed fan
- Optional log set
- Door and louver trim options
 Painted Metallic Black, Standard
 Antique Copper
- Gold
- Pewter

Stove Details

BTU Max Input	33,800 BTU/hr					
Heating Area	2,000 ft ²					
Efficiency	69.7%					
Glass Size	185 in ²					
EPA Emissions	0.89 g/hr					
Hopper Capacity	55 lbs					
Stove Dimensions	HEIGHT WIDTH DEPTH 33" 25" 25"					




 \sim 3



- Cast iron construction
- Tri-mode enabled thermostat
- Remote thermostat compatible
- Large heat exchanger
- 160 CFM variable speed fan
- Large Hopper
- Walnut Handle
- Optional log set

Stove Details

BTU Max Input	33,8	33,800 BTU/hr					
Heating Area	2	2,000 ft ²					
Efficiency		69.7%					
Glass Size		138 in²					
EPA Emissions	0	0.89 g/hr					
Hopper Capacity		51 lbs					
Stove Dimensions			DEPTH 24 "				




Design Features

- Cast iron construction
- Tri-mode enabled thermostat
- Large glass size (231 in²)
- Large hopper capacity (60 lbs)
- Optional brick liner
- Optional log set
- 300 CFM variable speed fan
- Operates with cast doors open or closed
- Available in Painted Black

Stove Details

BTU Max Input	35,700 BTU/hr					
Heating Area	2,500 ft ²					
Efficiency	60.3%					
Glass Size	231 in ²					
EPA Emissions	1.82 g/hr					
Hopper Capacity	60 lbs					
Stove Dimensions	HEIGHT WIDTH DEPTH 32" 30" 27½"					




4



- Large Glass Size (169 in²)
- Huge 80 lbs hopper capacity
- Fluted cast iron firebox liner
- Remote thermostat compatible
- Tri-mode enabled thermostat
- Large, full-pedestal ash pan
- Optional brick liner
- Optional log set
- Optional wooden door handle
- Optional hopper extension kit (120lbs)
- 300 CFM variable speed fan

Stove Details

BTU Max Input	35,700 BTU/hr						
Heating Area	2,500 ft ²						
Efficiency	60.3%						
Glass Size	169 in ²						
EPA Emissions	1.82 g/hr						
Hopper Capacity	80 lbs						
Stove Dimensions	HEIGHT WIDTH DEPTH 37" 24" 29"						




Design Features

- Tri-mode operating system
- Large 1,320 in² heat exchanger
- Dual chamber ash pan removal
- Automatic controls
- Remote thermostat compatible
- Massive 130 lbs hopper capacity
- Tri-mod enabled thermostat
- 455 CFM variable speed fan

Stove Details

BTU Max Input	63,300 BTU/hr					
Heating Area	2,700 ft ²					
Efficiency	77.4%					
Glass Size	117 in ²					
EPA Emissions	1.87 g/hr					
Hopper Capacity	130 lbs					
Stove Dimensions	HEIGHT WIDTH DEPTH 42" 27" 31"					



Freestanding Performance Specifications

ATTRIBUTES	Р3	MINI	MERIDIAN STEEL	MERIDIAN CAST IRON	M55 CAST IRON	M55 STEEL	MAXX
BTU Max Input	27,700 BTU/hr	27,700 BTU/hr	33,800 BTU/hr	33,800 BTU/hr	35,700 BTU/hr	35,700 BTU/hr	63,300 BTU/hr
Heating Area	1,200 ft ²	1,200 ft ²	2,000 ft ²	2,000 ft ²	2,500 ft ²	2,500 ft ²	2,700 ft ²
Efficiency	66.2%	66.2%	69.7%	69.7%	60.3%	60.3%	77.4%
Glass Size	130 in ²	130 in ²	185 in ²	138 in ²	231 in ²	169 in ²	117 in ²
EPA Emissions	0.48 g/hr	0.48 g/hr	0.89 g/hr	0.89 g/hr	1.82 g/hr	1.82 g/hr	1.87 g/hr
Hopper Capacity	55 lbs	48 lbs	55 lbs	51 lbs	60 lbs	80 lbs	130 lbs
Convection Fan	130 сғм	130 сғм	160 сғм	160 CFM	300 CFM	300 CFM	455 CFM

Stove Dimensions*

ATTRIBUTES	Р3	MINI	MERIDIAN STEEL	MERIDIAN CAST IRON	M55 CAST IRON	M55 STEEL	MAXX
Stove Height	34"	34"	33"	31"	32"	37"	42"
Stove Width	20½"	18"	25"	30½"	30"	24"	27"
Stove Depth	24"	20"	25"	24"	27½"	29"	31"

Clearance to Combustibles*

ATTRIBUTES	Р3	MINI	MERIDIAN STEEL	MERIDIAN CAST IRON	M55 CAST IRON	M55 STEEL	MAXX
Min. distance to the stove's sides	8"	8"	6"	6"	6"	12"	12"
Min. distance behind the stove	4"	4"	3"	3"	3"	3"	4"
Min. alcove height	48"	48"	48"	48"	48"	48"	48"
Min. distance corner to wall	3"	3"	2"	2"	3"	3"	4"

^{*} Refer to your owners manual for detailed measurements.




Design Features

- Large arched bay door
- Remote control compatible
- Large heat exchanger
- Optional log set
- Tri-mode enabled thermostat
- 160 CFM variable speed fan
- Door and louver trim options
 Painted Metallic Black, Standard
- Antique Copper
- Gold
- Pewter

Fireplace Details

BTU Max Input	33,800 BTU/hr					
Heating Area	2,000 ft ²					
Efficiency	69.7%					
Glass Size	185 in²					
EPA Emissions	0.89 g/hr					
Hopper Capacity	55 lbs					
Minimum Install Dims.	HEIGHT WIDTH DEPTH 22¾" 22" 11"					




S y



- Cast iron construction
- Large glass size (231 in²)
- Multi-fuel compatible
- Air wash system for cleaner glass
- 300 cfm variable speed fan
- Operates with cast doors open or closed
- Optional log set
- Optional service rail kit
- Available in Painted Black

Fireplace Details

BTU Max Input	35,700 BTU/hr					
Heating Area	2,500 ft ²					
Efficiency	60.3%					
Glass Size	231 in²					
EPA Emissions	1.82 g/hr					
Hopper Capacity	60 lbs					
Min Install Dimensions	HEIGHT WIDTH DEP					



Fireplace Insert Performance Specifications

ATTRIBUTES	MERIDIAN	M55 CAST
BTU Max Input	33,800 BTU/hr	35,700 BTU/hr
Heating Area	2,000 ft ²	2,500 ft ²
Efficiency	69.7%	60.3%
Glass Size	185 in ²	231 in ²
EPA Emissions	0.89 g/hr	1.82 g/hr
Hopper Capacity	55 lbs	60 lbs
Convection Fan	160 сғм	200 сғм

Minimum Installation Dimensions*

ATTRIBUTES	MERIDIAN	M55 CAST
Height	22¾"	23"
Width	22"	25"
Depth	11"	16"

Clearance to Combustibles*

ATTRIBUTES	MERIDIAN	M55 CAST
Center of unit to side wall	20"	24"
Bottom of unit to bottom of 12"mantle	291/2"	33"
Bottom to max. ¾" combustible facing	8"	0"
Side of unit to side facing	8"	0"
Door to edge of floor protection	6"	6"
Side of unit to side of floor protection	6"	6"

^{*} Refer to your owners manual for detailed measurements.

0

Freestanding Pellet Stoves

P3 | FREESTANDING PELLET STOVE

Mini | FREESTANDING PELLET STOVE

Meridian | FREESTANDING PELLET STOVE | Meridian | CAST IRON PELLET STOVE









M55 | CAST IRON MULTI-FUEL STOVE

M55 | FREESTANDING MULTI-FUEL STOVE MAXX | FREESTANDING PELLET STOVE







Pellet Fireplace Inserts

Meridian | PELLET FIREPLACE INSERT

M55 | CAST IRON MULTI-FUEL INSERT





Learn more about our products at

enviro.com

- Detailed Product Lineup
- Model Photo Galleries
- Downloadable Manual PDF's
- Unit Comparison Charts
- Youtube Burn Example Videos
- Online Brochures
- Dealer Locator Tool





The best way to visualize your dream fireplace at home is with the Enviro App!



















